


厦门晶视光电科技有限公司 Xiamen Amotec Display Co., LTD.


13. OUTLINE DIMENTION

ROHS

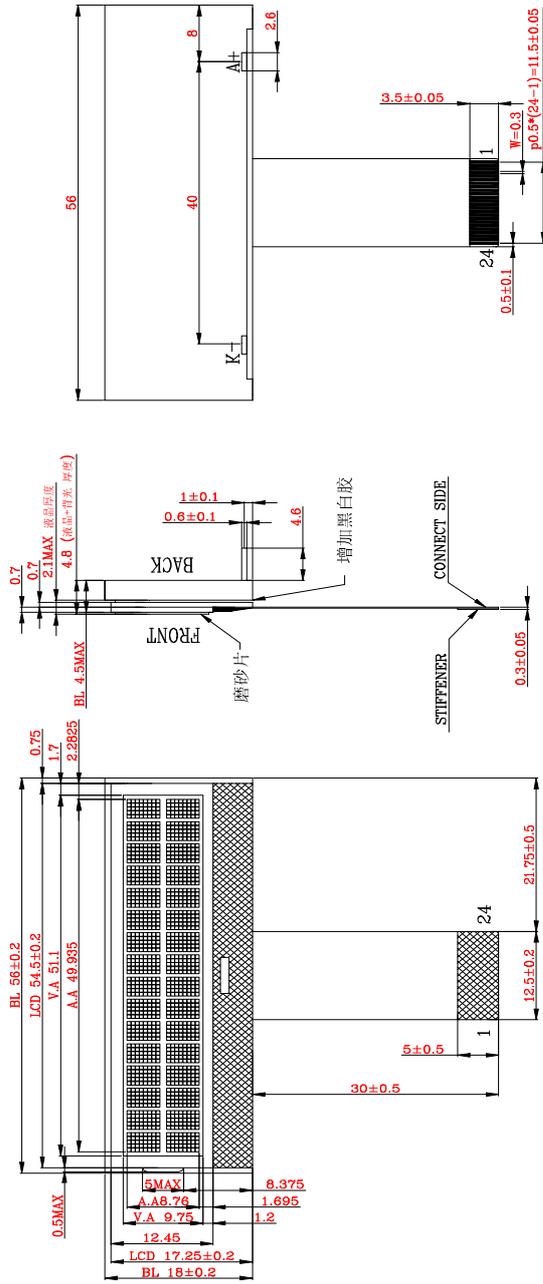


PIN FUNTION

NO.	PIN NO.				
1	V0	9	SHLS	17	DB2
2	C1-	10	SHLC	18	DB1
3	C1+	11	VSS	19	DB0
4	PS12B	12	DB7	20	E
5	PSB	13	DB6	21	R/W
6	VOUT	14	DB5	22	CSB
7	VIN	15	DB4	23	RS
8	VDD	16	DB3	24	XRESET



BACKLIGHT CIRCUIT



DOTS DETAIL
SCALE:2X

NOTES:

- 1.DISPLAY TYPE:DFSTN
- 2.VIEW DIRECTION:6 O'CLOCK
- 3.POLARIZER TYPE:TRANSMISSIVE/NEGATIVE
- 4.DRIVER METHOD:1/17 DUTY 1/5 BIAS
- 5.LCD DRIVING VOLTAGE:4.5V
- 6.LOGIC SUPPLY VOLTAGE:3.3V
- 7.OPERATING TEMP:-20°C~+70°C
- 8.STORAGE TEMP:-30°C~+80°C
- 9.CONTROLLER/DRIVE IC:ST70321-0D
- 10.CONNECTOR TYPE:COG+FFC
- 11.BACKLIGHT:1*3 PCS LED PARALLEL CONNECTION;
If=45mA&Vt=3.0V, Blue COLOR
- 12.OTHER TOLERANCE:±0.2mm
- 13.ROHS COMPLIANT

XIAMEN AMOTEC DISPLAY CO.,LTD

修改内容

DATE	20151028	REV	02
UNIT : mm	Product :	ADG1602A5-NSW-FBW	Count Dwg.
SCALE : 1/1	DRAWN :		
SHEET : 1/1	CHECKED :	Howard	PAGE : 1/1

CUSTOMER APPROVED: