



RoHS


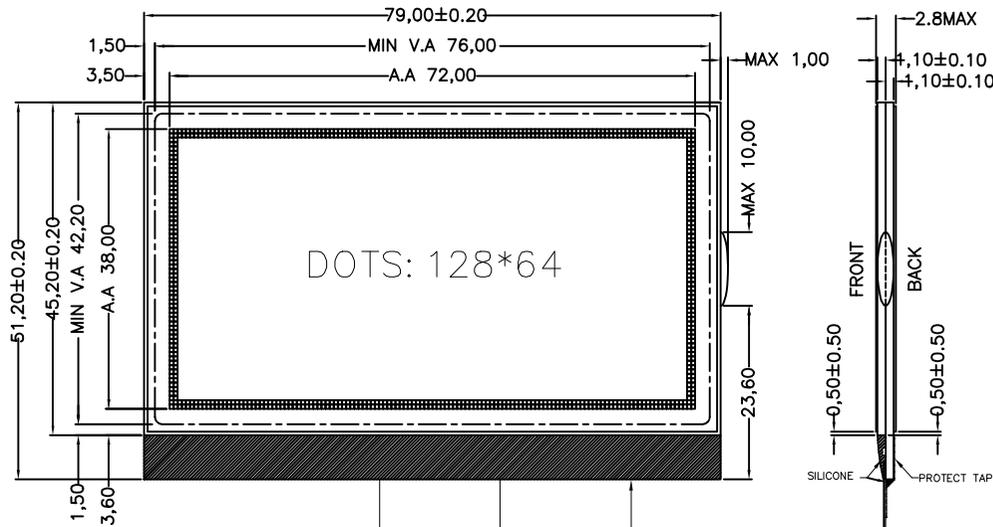


PIN FUNCTION

NO.	Pin Description	NO.	Pin Description
1	/CS1	17	VOUT
2	/RES	18	CAP4+
3	A0	19	CAP3+
4	VSS	20	CAP1-
5	WR	21	CAP1+
6	RD	22	CAP2+
7	DB0	23	CAP2-
8	DB1	24	V1
9	DB2	25	V2
10	DB3	26	V3
11	DB4	27	V4
12	DB5	28	V0
13	DB6	29	VSS
14	DB7	30	C86
15	VDD	31	P/S
16	VSS	32	VDD



↑ 6 O'CLOCK VIEWING DIRECTION



NOTES:

- 1.DISPLAY TYPE:FSTN
- 2.VIEWING DIRECTION:6 O'CLOCK
- 3.POLARIZER MODE: TRNSFLECTIVE/POSITIVE
- 4.DRIVE METHOD:1/65 DUTY 1/9 BIAS
- 5.LCD DRIVE VOLTAGE:9.0V
- 6.LOGIC POWER SUPPLY VOLTAGE:3.0V
- 7.OPREATING TEMP:-10°C~+60°C
- 8.STORAGE TEMP:-20°C~+70°C
- 9.CONTROLLER IC:ST7565P-G
- 10.CONNECTION TYPE:COG+FPC
- 11.OTHER TOLERANCE:±0.2

日期	版本	修改内容	XIAMEN AMOTEC DISPLAY CO.,LTD			
			DATE	2013.05.24	REV	01
			UNIT : mm	Product :	ADG12864A5	
			SCALE : 1/1	DRAWN :	Hazel	CHECKED : Duke
			SHEET : 1/1			PAGE : 1/1