


厦门晶视光电科技有限公司 Xiamen Amotec Display Co., LTD.

11. OUTLINE DIMENTION



Specification:


- 1). Driving: Duty:1/65, Bias:1/9,
- 2). Waving Direction: 6 O'clock
- 3). Display mode: STN/Reflective/Positive/Gray
- 4). Operating temp: -20°C~+70°C
- 5). Storage temp: -30°C~+80°C
- 6). Drive IC: SPLG501C
- 7). Dimensions with mark "*" are important, with mark "()" are referenced
- 8). All materials must meet for Rohs

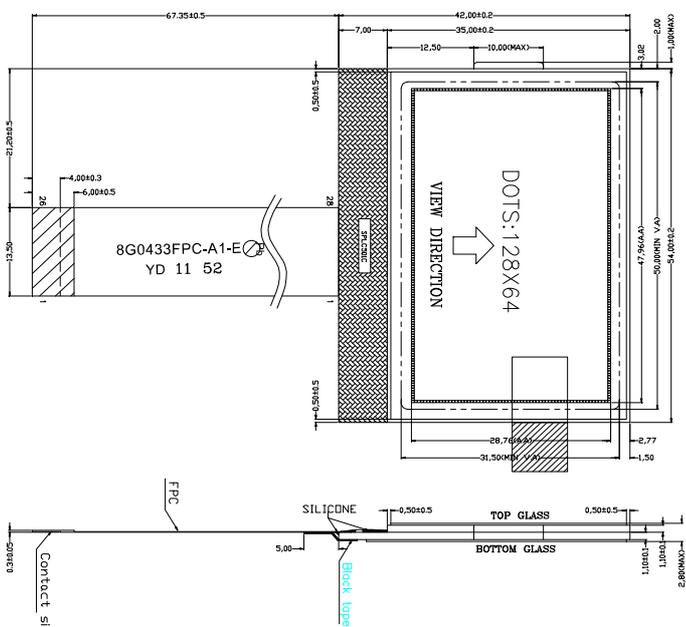

8G0433FPC-A1-E
YD 11 52

DOTS: 128X64
VIEW DIRECTION →

Scale: 10:1



PIN	SYMBOL	PIN	SYMBOL
1	/CS1	19	CP1-
2	/RES1	20	CP2-
3	A0	21	CP2+
4	/MR	22	V1
5	/RD	23	V2
6	D0	24	V3
7	D1	25	V4
8	D2	26	V5
9	D3		
10	D4		
11	D5		
12	D6		
13	D7		
14	VDD		
15	VSS		
16	/VOUT		
17	CP3-		
18	CP1+		

DATE: 2013.07.18 REV: 02

UNIT: mm SCALE: 1/1 SHEET: 1/1

XIAMEN AMOTEC DISPLAY CO.,LTD

Product: ADG12864A4

DRAWN: Hazel CHECKED: Duke PAGE: 1/1

日期	版本	修改内容	