


# 厦门晶视光电科技有限公司 Xiamen Amotec Display Co., LTD.

## 11. OUTLINE DIMENTION


**ROHS**

- NOTES:
- 1.DISPLAY TYPE: FSTN
  - 2.VIEWING DIRECTION: 6 O'CLOCK
  - 3.POLARIZER MODE: TRANSPARENT/POSITIVE
  - 4.DRIVE METHOD: 1/65 DUTY 1/9 BIAS
  - 5.LCD DRIVE VOLTAGE:9.5V
  - 6.LOGIC POWER SUPPLY VOLTAGE: 3.3V
  - 7.OPREATING TEMP: -20°C~+70°C
  - 8.STORAGE TEMP: -30°C~+70°C
  - 9.DRIVER/CONTROLLER IC:ST7565R
  - 10.CONNECTION TYPE: COG+PPC
  - 11.OTHER TOLERANCE:±0.2

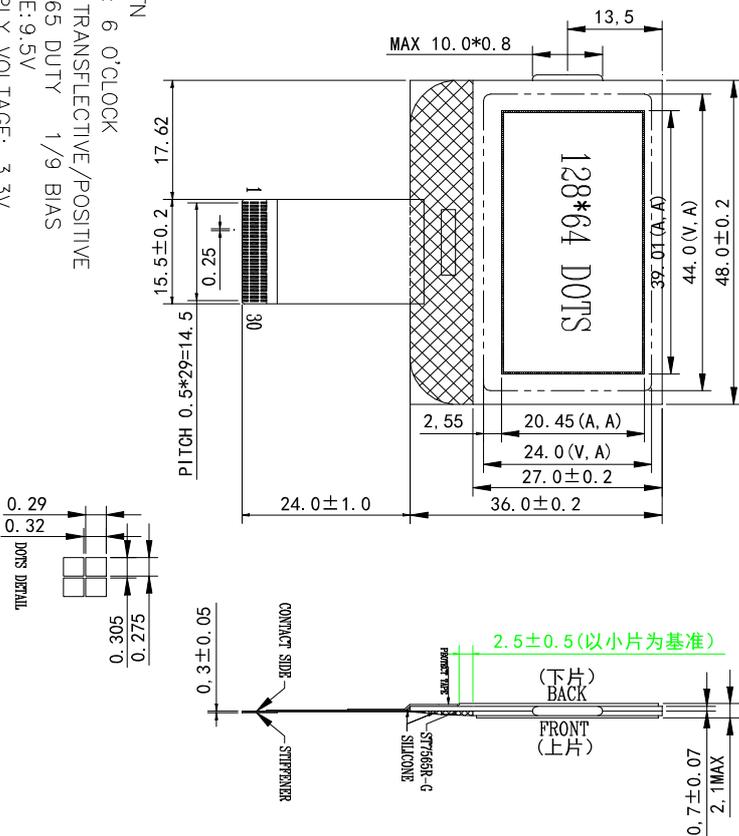

PIN FUNCTION:

NO	SYMBOL	NO	SYMBOL
1	PSB	16	VDD
2	C86	17	DB7
3	V0	18	DB6
4	V1	19	DB5
5	V2	20	DB4
6	V3	21	DB3
7	V4	22	DB2
8	C2-	23	DB1
9	C2+	24	DB0
10	C1+	25	RD
11	C1-	26	WR
12	C3+	27	A0
13	NC	28	RST
14	VOUT	29	CS2
15	VSS	30	CS1B



日期	版本	修改内容

<b>XIAMEN AMOTEC DISPLAY CO.,LTD</b>	
DATE	2013.08.06
UNIT : mm	REV   01
SCALE : 1/1	Product : ADG12864A7
SHEET : 1/1	DRAWN : Hazze1
	CHECKED : Duke
	PAGE : 1/1

MODEL

ADG12864A7

18/18

PRODUCT SPECIFICATIONS

REV: A