



RoHS

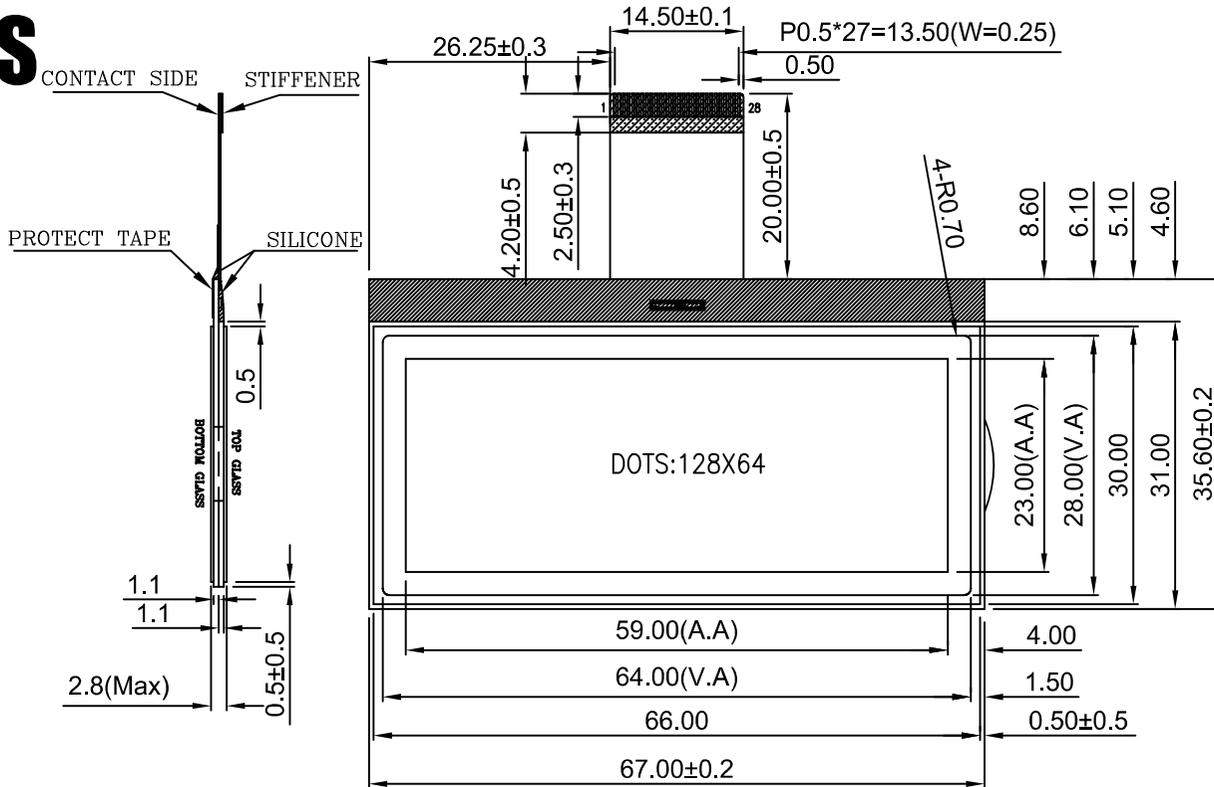


PIN	SYMBOL	PIN	SYMBOL
1	CS1	15	VOUT
2	RES	16	CAP3P
3	A0	17	CAP1N
4	WR	18	CAP1P
5	RD	19	CAP2P
6	D0	20	CAP2N
7	D1	21	V4
8	D2	22	V3
9	D3	23	V2
10	D4	24	V1
11	D5	25	V0
12	D6	26	C86
13	D7	27	P/S
14	VSS	28	VDD

NOTES:

- | | |
|---------------------------|------------------------|
| 1. DISPLAY TYPE: | FSTN |
| 2. OPERATING VOLTAGE: | VOP:9.0V;VDD:3.0V |
| 3. OPERATING TEMPERATURE: | -20°C~70°C |
| 4. STORAGE TEMPERATURE: | -30°C~80°C |
| 5. DRIVE MODE: | 1/65D,1/9B |
| 6. VIEWING DIRECTION: | 12:00 |
| 7. POLARIZER TYPE: | TRANSFLECTIVE,POSITIVE |
| 8. CONNECTOR: | COG |
| 9. Driver IC: | ST7565R |



DOTS SIZE

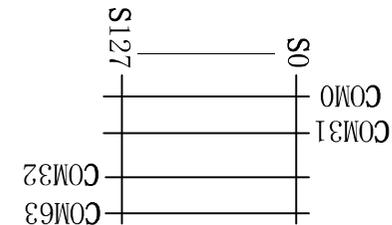

LCD LAYOUT

日期	版本	修改内容	XIAMEN AMOTEC DISPLAY CO.,LTD			
09.12	02	修改FPC公差及PIN定义	DATE	2013.09.16	REV	03
09.16	03	修改PIN定义	UNIT : mm	Product :	ADG12864A8	
			SCALE : 1/1	DRAWN :	Hazel	CHECKED : Duke
			SHEET : 1/1			PAGE : 1/1