
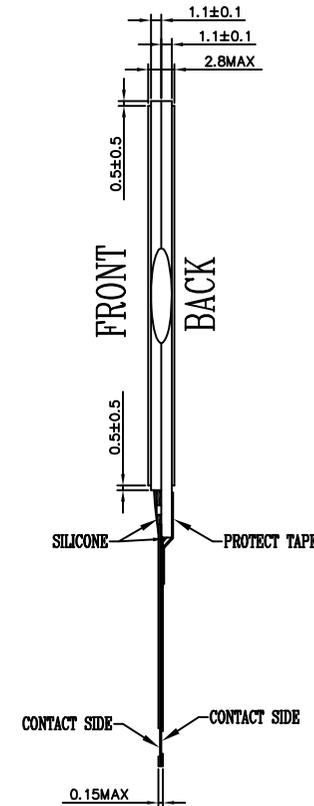
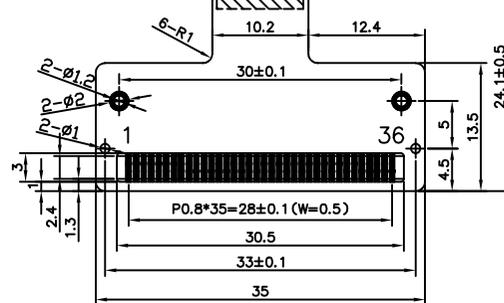
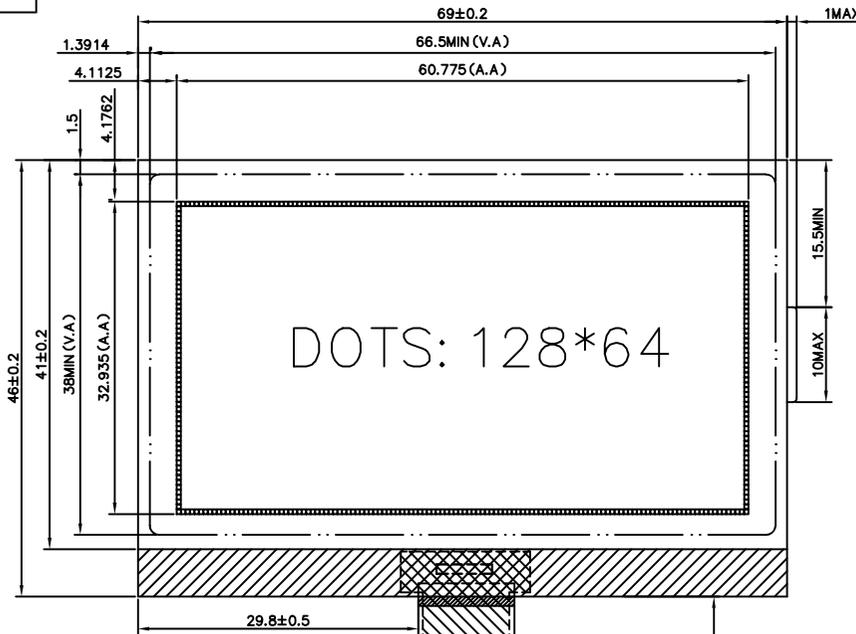



CUSTOMER APPROVED:

**RoHS**



PIN FUNCTION

NO.	SYMBOL	NO.	SYMBOL
1	NC	19	VOUT
2	IRS	20	VSS
3	NC	21	VDD
4	PSB	22	D7
5	C86	23	D6
6	NC	24	D5
7	VR	25	D4
8	VO	26	D3
9	V1	27	D2
10	V2	28	D1
11	V3	29	DO
12	V4	30	/RD(E)
13	NC	31	/WR(R/W)
14	CAP2N	32	A0
15	CAP2P	33	RST
16	CAP1P	34	CS1B
17	CAP1N	35	NC
18	CAP3P	36	NC



- NOTES:
- 1.DISPLAY TYPE:FSTN
  - 2.VIEW DIRECTION:6 O'CLOCK
  - 3.POLARIZER TYPE:TRANSFLECTIVE/POSITIVE
  - 4.DRIVER METHOD:1/65 DUTY 1/9 BIAS
  - 5.LCD DRIVING VOLTAGE:9.0V
  - 6.LOGIC SUPPLY VOLTAGE:3.0V
  - 7.OPERATING TEMP:-10°C~+60°C
  - 8.STORAGE TEMP:-20°C~+70°C
  - 9.CONTROLLER/DRIVE IC:ST7565R
  - 10.CONNECTOR TYPE:COG+FPC
  - 11.OTHER TOLERANCE:±0.2mm

日期	版本	修改内容	XIAMEN AMOTEC DISPLAY CO.,LTD			
			DATE	2014.09.24	REV	01
			UNIT : mm	Product :	ADG12864A10	Count Dwg.
			SCALE : 1/1	DRAWN :	CHECKED :	Howard
			SHEET : 1/1			PAGE : 1/1