


12. OUTLINE DIMENTION


RoHS

CUSTOMER APPROVED:

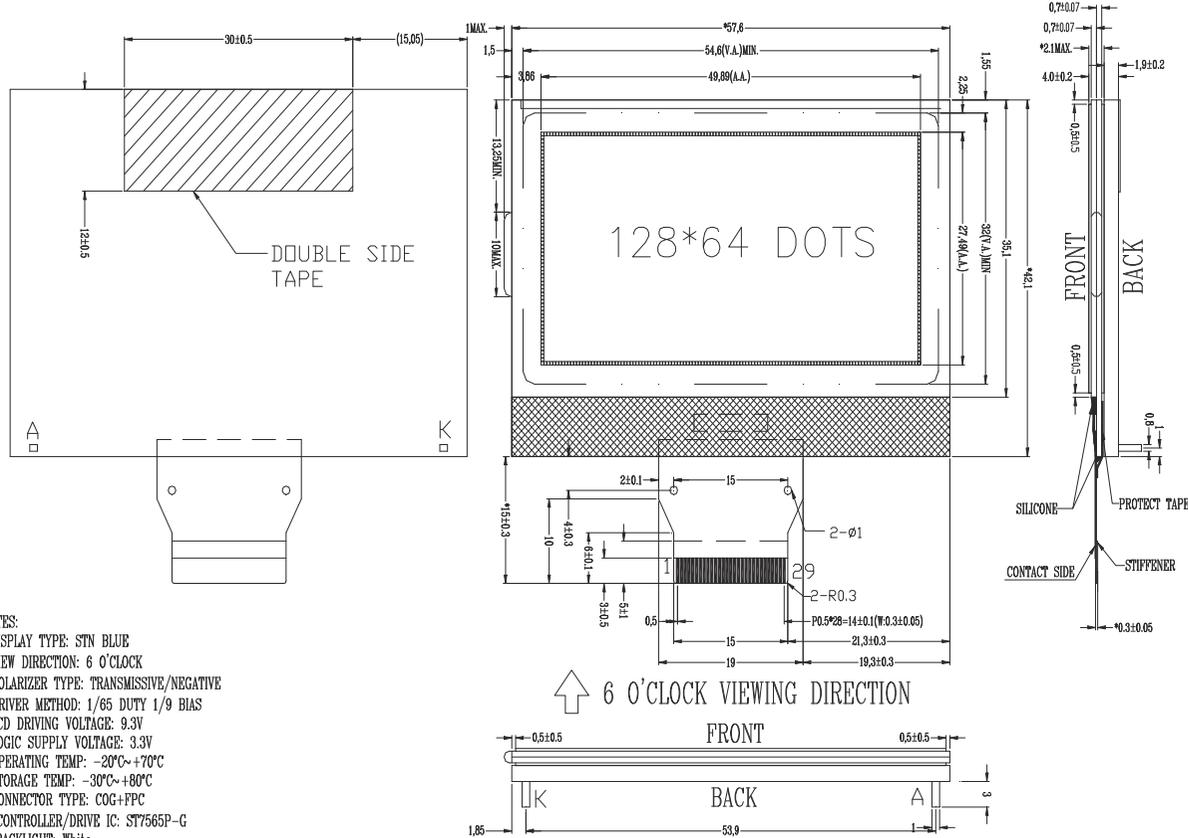

PIN FUNCTION

PIN NO.	SYMBOL	PIN NO.	SYMBOL
1	P/S	16	VDD
2	C86	17	D7
3	VR	18	D6
4	V0	19	D5
5	V1	20	D4
6	V2	21	D3
7	V3	22	D2
8	V4	23	D1
9	CAP2N	24	D0
10	CAP2P	25	/RD(E)
11	CAP1P	26	/WR(R/W)
12	CAP1N	27	A0
13	CAP3P	28	/RES
14	VOUT	29	/CS1
15	VSS		



- NOTES:
- 1.DISPLAY TYPE: STN BLUE
 - 2.VIEW DIRECTION: 6 O'CLOCK
 - 3.POLARIZER TYPE: TRANSMISSIVE/NEGATIVE
 - 4.DRIVER METHOD: 1/65 DUTY 1/9 BIAS
 - 5.LCD DRIVING VOLTAGE: 9.3V
 - 6.LOGIC SUPPLY VOLTAGE: 3.3V
 - 7.OPERATING TEMP: -20°C~+70°C
 - 8.STORAGE TEMP: -30°C~+80°C
 - 9.CONNECTOR TYPE: COG+FPC
 - 10.CONTROLLER/DRIVE IC: ST7565P-G
 - 11.BACKLIGHT: White
DRIVER METHOD [VLED=3.3±0.3V, ILED=45mA]
 - 12.OTHER TOLERANCE: ±0.2mm
 - 13.Unspecified chamfer:C0.5

日期	版本	修改内容

XIAMEN AMOTEC DISPLAY CO.,LTD

DATE	2014.02.12	REV	01
UNIT : mm	Product :	ADG12864A13	Count Dwg.
SCALE : 1/1	DRAWN :	江文静	CHECKED : Howard
SHEET : 1/1			PAGE : 1/1

MODEL

ADG12864A13

19/19

PRODUCT SPECIFICATIONS

REV: A