

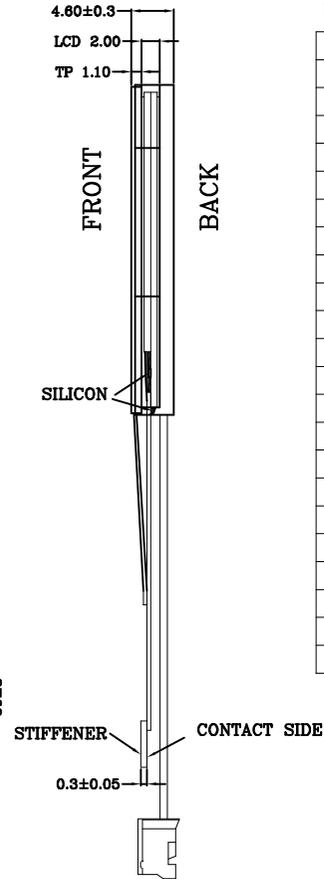
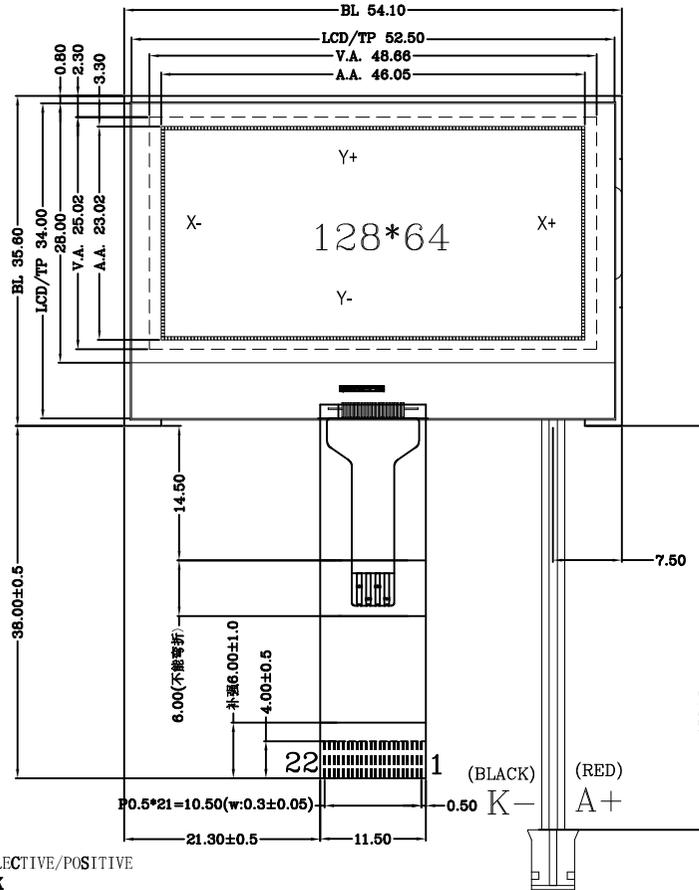


ROHS



INTERFACE:

NO.	SYMBOL
1	CSB
2	RSTB
3	A0
4	NC
5	NC
6	NC
7	NC
8	NC
9	NC
10	NC
11	NC
12	D6
13	D7
14	VDD
15	VSS
16	V0
17	XV0
18	VG
19	Y+
20	X-
21	Y-
22	X+



DOT DETAIL

- NOTES:
1. DISPLAY TYPE: FSTN/TRANSFLECTIVE/POSITIVE
 2. VIEWING DIRECTION: 6:00 CLOCK
 3. OPERATING TEMP: -20° C TO +70° C
 4. STORAGE TEMP: -30° C TO +80° C
 5. LCD OPERATING VOLTAGE: 9.0V
 6. VDD: 3.0V
 7. DRIVE METHOD: 1/65 DUTY 1/9 BIAS
 8. BACKLIGHT: WHITE/3CHIPS, 3.0V
 9. ALL UNMARKED TOLERANCES: ±0.2 mm
 10. IC: ST7567
 11. UNDEFINED TOLERANCE: ±0.2

日期	版本	修改内容	XIAMEN AMOTEC DISPLAY CO.,LTD			
			DATE	20150506	REV	02
			UNIT : mm	Product :	ADG12864A26	OUTLINE Dwg
			SCALE : 1/1	DRAWN :	Gaoyuyou	CHECKED :
			SHEET : 1/1			PAGE : 1/1