




# RoHS

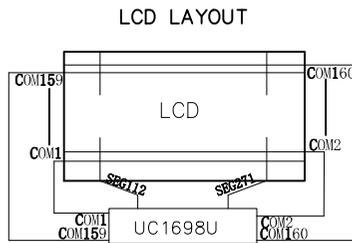

**DETAIL DOTS  
SCALE 20:1**

**NOTES:**

- 1.DISPLAY TYPE:FSTN
- 2.VIEW DIRECTION:6 O'CLOCK
- 3.POLARIZER TYPE: TRANSFLECTIVE/POSITIVE
- 4.DRIVER METHOD: 1/160 DUTY 1/14 BIAS
- 5.LCD DRIVING VOLTAGE: 16.5V
- 6.LOGIC SUPPLY VOLTAGE: 3.3V
- 7.OPERATING TEMP: -20°C~+70°C
- 8.STORAGE TEMP: -30°C~+80°C
- 9.CONTROLLER/DRIVE IC: UC1698U
- 10.CONNECTOR TYPE: COG+FPC
- 11.OTHER TOLERANCE: ±0.2mm
- 12.RoHS COMPLIANT

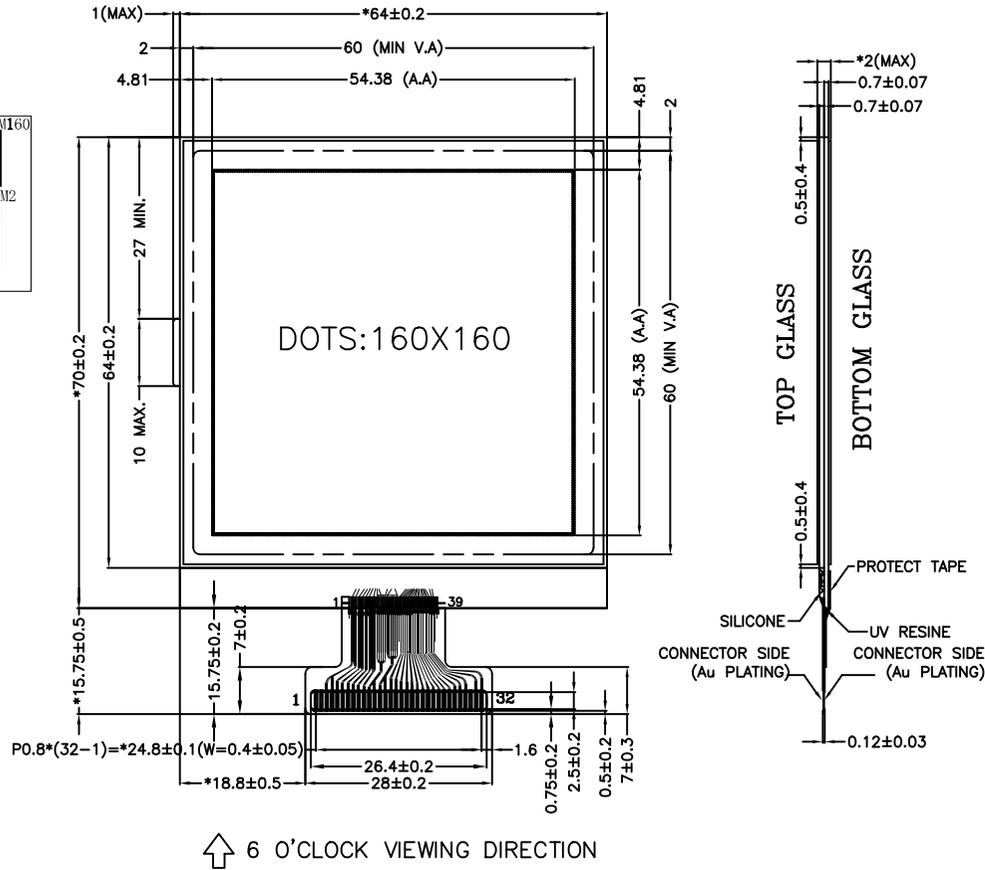

Pin assignment	
No	Symbol
1	NC
2	NC
3	VLCD
4	VLCD
5	VS+
6	VS-
7	VB0-
8	VB1-
9	VB1+
10	VB0+
11	VDD
12	VDD
13	VSS
14	VSS
15	BMO
16	CS0
17	CD
18	WR1
19	WR0
20	RST
21	D0
22	D1
23	D2
24	D3
25	D4
26	D5
27	D6
28	D7
29	D8
30	NC
31	D13
32	D15

日期	版本	修改内容	XIAMEN AMOTEC DISPLAY CO.,LTD			
			DATE	2013.11.12	REV	01
			UNIT : mm	Product :	ADG160160A1	
			SCALE : 1/1	DRAWN :	Wendy	CHECKED : Duke
			SHEET : 1/1			PAGE : 1/1