
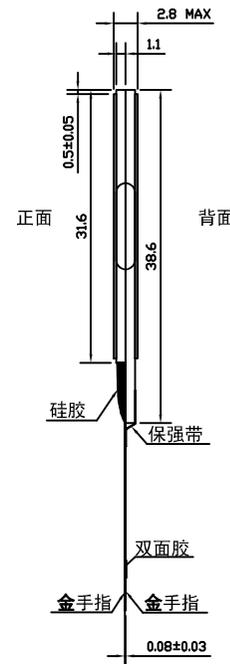


CUSTOMER APPROVED:

RoHS

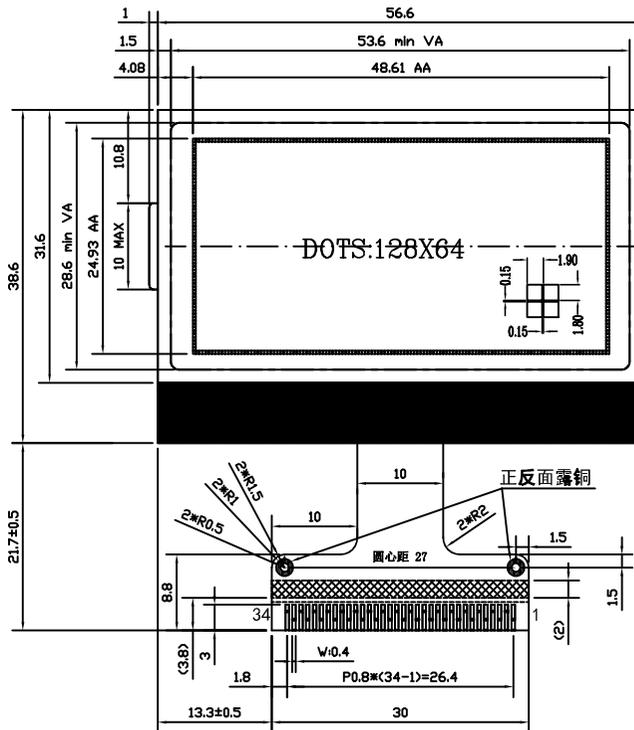

NO.	SYMBOL	NO.	SYMBOL
1	NC	18	V0
2	CSB	19	XV0
3	RST	20.	NC
4	A0	21	NC
5	NC	22	NC
6	NC	23	NC
7	NC	24	VG
8	NC	25	NC
9	NC	26	NC
10	NC	27	NC
11	NC	28	NC
12	NC	29	NC
13	SCL	30	NC
14	SDA	31	NC
15	VDD	32	NC
16	VSS	33	NC
17	NC	34	NC

NOTES:

- 1.DISPLAY TYPE: FSTN/POSITIVE
- 2.VIEWING DIRECTION: 6:00
- 3.POLARIZER MODE: TRANSMISSIVE
- 4.IC: ST7567
- 5.OPERATING TEMP: -10°C~+60°C
- 6.STORAGE TEMP: -20°C~+70°C
- 7.Drive Method: 1/65duty 1/7bias
- 8.LCD OPERATING VOLTAGE: VDD=3V,Vop=8.2V
- 9.CONNECTOR: CDG/FPC
- 10.UNMARKED TOLERANCES: ±0.2mm
- 11.REQUIREMENT ON ENVIRONMENTAL PROTECTION: RoHS

日期	版本	XIAMEN AMOTEC DISPLAY CO.,LTD			
		DATE	2017.08.17	REV	A
		UNIT : mm	Product :	ADG12864A39	Count Dwg.
		SCALE : 1 / 1	DRAWN :	CHECKED :	PAGE : 1 / 1
		SHEET : 1 / 1			