


RoHS

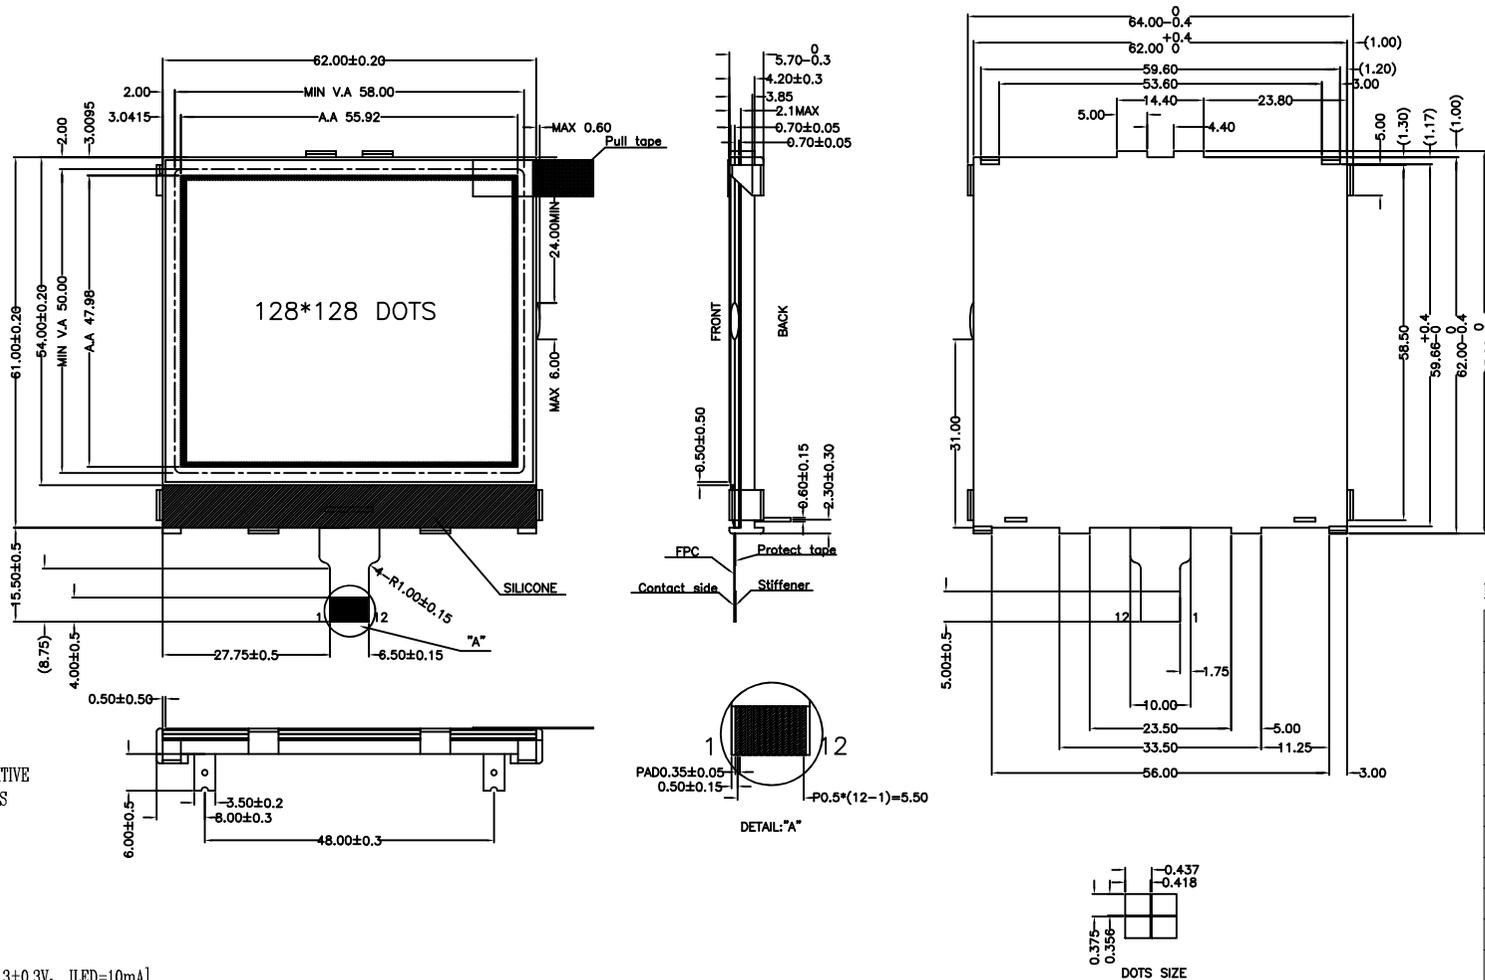

- NOTES:
- 1.DISPLAY TYPE: FSTN/White-Black
 - 2.VIEW DIRECTION: 6 O'CLOCK
 - 3.POLARIZER TYPE: TRANFLECTIVE/POSITIVE
 - 4.DRIVER METHOD: 1/128 DUTY 1/9 BIAS
 - 5.LCD DRIVING VOLTAGE: 11.8V
 - 6.LOGIC SUPPLY VOLTAGE: 3.3V
 - 7.OPERATING TEMP: -10°C~+70°C
 - 8.STORAGE TEMP: -30°C~+70°C
 - 9.CONNECTOR TYPE: COG+FPC
 - 10.CONTROLLER/DRIVE IC: ST7571
 - 11.BACKLIGHT: WHITE
 - DRIVER METHOD [VLED=3.3±0.3V, ILED=10mA]
 - 12.OTHER TOLERANCE: ±0.2mm
 - 13.Unspecified chamfer:C0.5

PIN ASSIGNMENT

NO.	NAME.
1	VG
2	VD1
3	XVO
4	VO
5	VM0
6	VSS
7	VDD
8	SID
9	SCLK
10	A0
11	RST
12	CSB

日期	版本	修改内容

 XIAMEN AMOTEC DISPLAY CO.,LTD 					
DATE	2013.09.06	REV	01		
UNIT : mm	Product :	ADG128128A2		Count Dwg.	
SCALE : 1/1	DRAWN :	Hazel	CHECKED :	Duke	PAGE : 1/1
SHEET : 1/1					