



# 厦门晶视光电科技有限公司 Xiamen Amotec Display Co., LTD.

## 12. OUTLINE DIMENTION

**ROHS**

- NOTES:
- 1.DISPLAY TYPE:FSTN
  - 2.VIEWING DIRECTION:6 O'CLOCK
  - 3.POLARIZER MODE:TRANSFLECTIVE/POSITIVE
  - 4.DRIVE METHOD:1/128 DUTY 1/11 BIAS
  - 5.LCD DRIVE VOLTAGE:14.0V
  - 6.LOGIC POWER SUPPLY VOLTAGE:3.3V
  - 7.OPERATING TEMP:-20° C--+80° C
  - 8.STORAGE TEMP:-30° C--+70° C
  - 9.CONTROLLER IC:UC1617WGAB
  - 10.CONNECTION TYPE:COG+PC
  - 11.OTHER TOLERANCE:±0.2

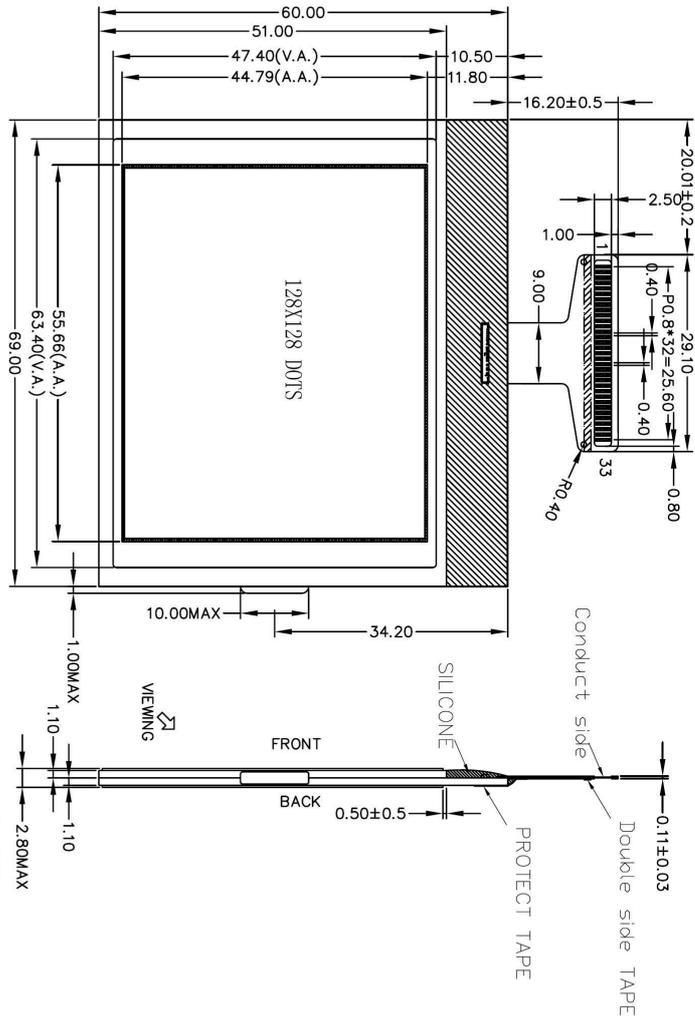

PIN NO.	PIN FUNCTION	PIN NO.	PIN FUNCTION
1	D0	13	WR1
2	D1	14	BM0
3	D2	15	BM1
4	D3	16~19	VSS
5	D4	20~23	VDD
6	D5	24~25	VBO+
7	D6	26~27	VB1+
8	D7	28~29	VB1-
9	RST	30~31	VB0-
10	CS0	32	VLCD
11	CD	33	VLCD
12	WRD		

日期	版本	修改内容

<b>XIAMEN AMOTEC DISPLAY CO.,LTD</b>	
DATE	2013.07.19
UNIT : mm	Product : ADG128128A1
SCALE : 1/1	DRAWN : Hazel
SHEET : 1/1	CHECKED : Duke
	PAGE : 1/1